




## XPS10 - Square

Technical data sheet bucket | XPS-10

Construction professional forpaints, chemicals and other building materials



### Basic Data:

Weight category: **E**  
Weight: no handle 250 g  
Volume to rim: 11,30 l  
Top load performance: 30,0 kg

### Dimensions:

D1: 250 x 250 mm/inch  
D2: 245 x 245 mm/inch  
D3: 222,0 x 222,0 mm/inch  
H ( Without Lid ) 232,0 mm/inch

### Tolerances:

Dimensions: ± 1 mm/inch  
Weight tolerance: ± 5

### Possible combinations:

#### Handle

### Description:

metal handle  
plastic grips

### Weight:

36,0 g  
15,0 g

#### lid

### Type:

Standard

### Description

XPS-10 Square

### Stacking height

#### two fold:

520,0 mm/inch

### Each further:

255,0 mm/inch

#### Decoration

### Methods:

Digital

IML

Offest

### Height:

210,0 mm/inch

250,00 mm/inch

210,0 mm/inch

### Width

806,0 mm/inch

796,50 mm/inch

790,0 mm/inch

### Median breadth:


0,0 mm/inch

806,0 mm/inch

# Square

Logistics (standard view)

<b>Pallet</b>	EUP (Europallet)
<b>Width</b>	80 cm (31,5 '')
<b>Length</b>	120 cm (47,24 '')
<b>Height</b>	2,20 m
<b>Quantity per pallet</b>	800
<b>Quantity per layer</b>	16

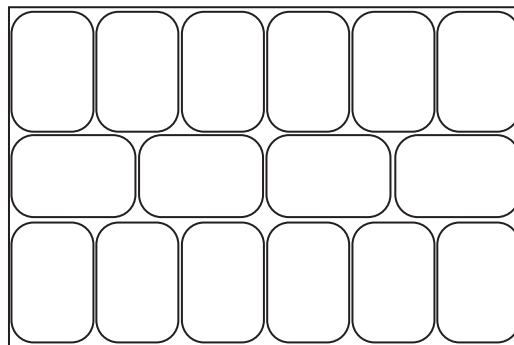

Material:

**Description:**

100% Virgin material

**Labelling:**



**Recycling Code:**



**Certifications:**



misc.

All deliveries are subject to our General Terms and Conditions of Delivery. With respect to possible tolerances, deformations and ink adhesion of the design, express reference is hereby made to our Technical Guidelines, which shall also form an integral part of the content of any delivery transaction. In our Technical Guidelines you will also find details referring to strictest quality and hygiene standards, storage, filling and performance requirements as well to applications and transport. Verbal statements regarding technical data or attributes of our products shall always be limited to the scope that we recommend. Our terms and Conditions of Delivery and Technical Guidelines may be available. For technical reasons, the product image may deviate from the actual item. Technical modifications reserved.



### Basic Data:

Weight category: **F**  
Weight: 68 g  
Displaced volume: 0,00 l

### Tolerances:

Dimensions: ± 1 mm/inch  
Weight tolerance: ± 5

### Decoration

### Method:


IML  
Offest

### Diameter:

00,00 mm/inch  
0,0 mm/inch

### Logistics (standard view)

<b>Pallet</b>	EUP (Europallet)
<b>Width</b>	80 cm (31,5 '')
<b>Length</b>	120 cm (47,24 '')
<b>Height</b>	2,20 m
<b>Quantity per pallet</b>	5280
<b>Quantity per layer</b>	16

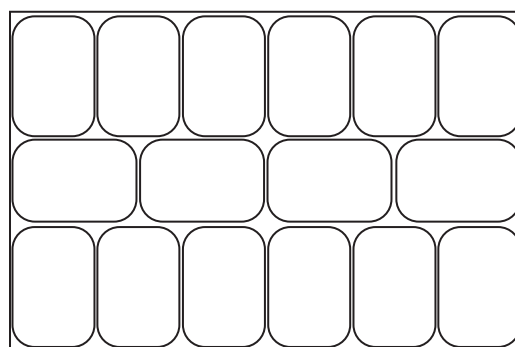

### Material:

### Description:

100% Virgin material

### Labelling:



### Recycling Code:



### Certifications:



# XPLAST®

NOTE:

All deliveries are subject to our General Terms and Conditions of Delivery. With respect to possible tolerances, deformations and ink adhesion of the design, express reference is hereby made to our Technical Guidelines, which shall also form an integral part of the content of any delivery transaction. In our Technical Guidelines you will also find details referring to strictest quality and hygiene standards, storage, filling and performance requirements as well to applications and transport. Verbal statements regarding technical data or attributes of our products shall always be limited to the scope that we recommend. Our terms and Conditions of Delivery and Technical Guidelines may be available. For technical reasons, the product image may deviate from the actual item. Technical modifications reserved.



**XPLAST®**  
Plastic Buckets & Prints.

XPLAST ensures that the information herein is provided to the best of its experience and its technical and scientific knowledge, however, being elements such as weather conditions, labor, tools, quality of third-party products, and others, not under the direct control of the XPLAST, this document does not constitute a warranty, nor does XPLAST authorize its agents and/or representatives to provide any kind of warranty based on the information contained in this document. We recommend that you always check the suitability of the product for each specific instance. This supersedes all previous editions. XPLAST guarantees that the information contained in this technical data sheet is correct, to the best of its technical and scientific knowledge. Notwithstanding the foregoing, XPLAST assumes no responsibility for the results obtained through the use of its product in that the means of application are beyond the scope of its control and/or verification. As such, we recommend checking that each product is suited to the specific case.



**National Road: Kaçanik – Ferizaj**  
**km 15 XK, 71000, 044 255 822**  
**[www.xplast.eu](http://www.xplast.eu)**