




XPS5 - Square

Technical data sheet bucket | XPS-5

Construction professional forpaints, chemicals and other building materials



Basic Data:

Weight category: **E**
Weight: no handle 148 g
Volume to rim: 4,98 l
Top load performance: 26,0 kg

Dimensions:

D1: 245 x 245 mm/inch
D2: 241 x 241 mm/inch
D3: 232,0 x 232,0 mm/inch
H (Without Lid) 123,0 mm/inch

Tolerances:

Dimensions: ± 1 mm/inch
Weight tolerance: ± 5

Possible combinations:

Handle

Description:

metal handle
plastic grips

Weight:

36,0 g
15,0 g

lid

Type:

Standard

Description

XPS-5 Square

Stacking height

two fold:
230,0 mm/inch

Each further:

109,0 mm/inch

Decoration

Methods:

Digital
IML
Offest

Height:

70,0 mm/inch
100,00 mm/inch
70,0 mm/inch

Width

806,0 mm/inch
802,50 mm/inch
735,0 mm/inch


Median breadth:

0,0 mm/inch
806,0 mm/inch

Square

Logistics (standard view)

Pallet	EUP (Europallet)
Width	80 cm (31,5 '')
Length	120 cm (47,24 '')
Height	2,20 m
Quantity per pallet	1280
Quantity per layer	16

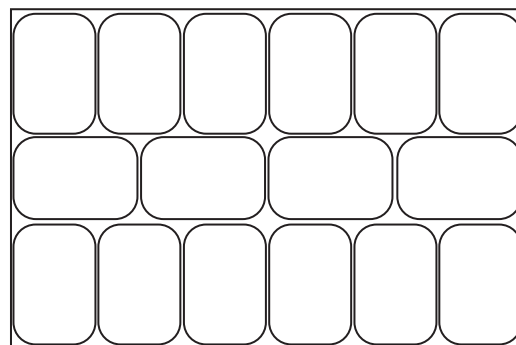

Material:

Description:

100% Virgin material

Labelling:



Recycling Code:



Certifications:



misc.

All deliveries are subject to our General Terms and Conditions of Delivery. With respect to possible tolerances, deformations and ink adhesion of the design, express reference is hereby made to our Technical Guidelines, which shall also form an integral part of the content of any delivery transaction. In our Technical Guidelines you will also find details referring to strictest quality and hygiene standards, storage, filling and performance requirements as well to applications and transport. Verbal statements regarding technical data or attributes of our products shall always be limited to the scope that we recommend. Our terms and Conditions of Delivery and Technical Guidelines may be available. For technical reasons, the product image may deviate from the actual item. Technical modifications reserved.



Basic Data:

Weight category: **F**
 Weight: 68 g
 Displaced volume: 0,40l

Tolerances:

Dimensions: ± 1 mm/inch
 Weight tolerance: ± 5

Decoration

Method:

Height

Width:


IML
 Offest

268,00 mm/inch
 140,0 mm/inch

179,50 mm/inch
 230,0 mm/inch

Logistics (standard view)

Pallet	EUP (Europallet)
Width	80 cm (31,5 '')
Length	120 cm (47,24 '')
Height	2,20 m
Quantity per pallet	4480
Quantity per layer	16

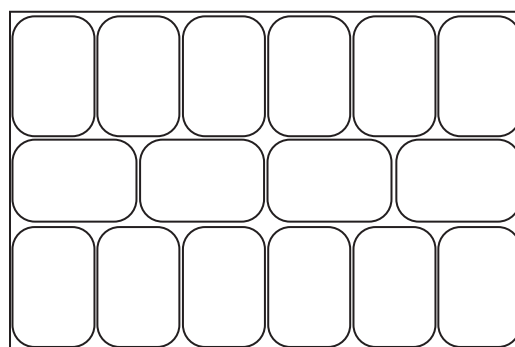

Material:

Description:

100% Virgin material

Labelling:



Recycling Code:



Certifications:



XPLAST®

NOTE:

All deliveries are subject to our General Terms and Conditions of Delivery. With respect to possible tolerances, deformations and ink adhesion of the design, express reference is hereby made to our Technical Guidelines, which shall also form an integral part of the content of any delivery transaction. In our Technical Guidelines you will also find details referring to strictest quality and hygiene standards, storage, filling and performance requirements as well to applications and transport. Verbal statements regarding technical data or attributes of our products shall always be limited to the scope that we recommend. Our terms and Conditions of Delivery and Technical Guidelines may be available. For technical reasons, the product image may deviate from the actual item. Technical modifications reserved.



XPLAST®
Plastic Buckets & Prints.

XPLAST ensures that the information herein is provided to the best of its experience and its technical and scientific knowledge, however, being elements such as weather conditions, labor, tools, quality of third-party products, and others, not under the direct control of the XPLAST, this document does not constitute a warranty, nor does XPLAST authorize its agents and/or representatives to provide any kind of warranty based on the information contained in this document. We recommend that you always check the suitability of the product for each specific instance. This supersedes all previous editions. XPLAST guarantees that the information contained in this technical data sheet is correct, to the best of its technical and scientific knowledge. Notwithstanding the foregoing, XPLAST assumes no responsibility for the results obtained through the use of its product in that the means of application are beyond the scope of its control and/or verification. As such, we recommend checking that each product is suited to the specific case.



National Road: Kaçanik – Ferizaj
km 15 XK, 71000, 044 255 822
www.xplast.eu